


Table of Contents

Hyperion® Universal Zoom MARK IV	3
Technical data	3
Included Items	4
The fourth generation of Hyperion® Zoom eyepiece	5
Continuously adjustable Magnification with ClickStops at 8/12/16/20/24 mm . . .	5
Eyecups	6
Changing the mounting adapters A and B	7
Telescope-sided connection options	8
2" Eyepiece Barrel (intended for 2" Star Diagonals):	8
1¼" eyepiece clamp with adapter B (typical for most telescopes):	8
2"-SC-thread	8
Filters	9
Connection options for spotting scopes	9
Spotting scopes with integrated 1¼" eyepiece	9
Spotting Scopes with 1⅜" male thread	10
Zeiss-Diascope Spotting Scopes	10
Kowa STN 770/880 Spotting Scopes	10
Zero-Length-Adapters	11
Connection options for cameras and video photography	11
Attaching a camery body (DSLR and System-Cameras)	11
Attaching camera-lenses by their front-lens filter threads	13
Digiscoping-overview	13
Use with Binoviewers	14
Important Mark IV Zoom accessories	15
The optional Hyperion® Zoom Barlow Lens – 2,25x #2956180	15
Camera-sided Adapters	16
Telescope-sided Adapters and further accessories	16

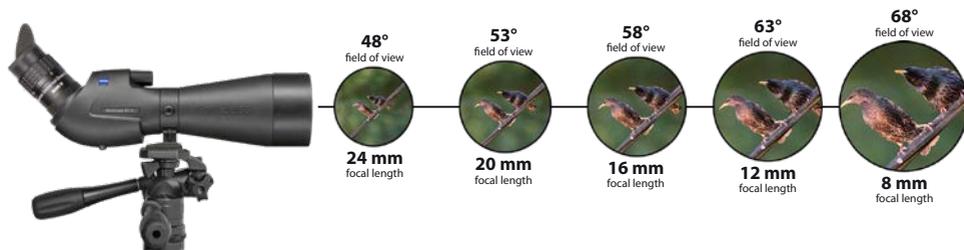

Hyperion® Universal Zoom MARK IV

– WITH 1¼" AND 2" NOSEPIECE –



Hyperion® Universal Zoom Mark IV eyepiece with 2" nosepiece

Zoom-lenses in general are not really famous for high quality optics. Also many zoom-eyepieces do not deliver the best possible image quality at high magnification because they were designed with focus on the price-tag so that image sharpness and field size are getting worse with increased magnification.

The good reputation that the Hyperion® Zoom Eyepiece enjoys is based on the fact that it was designed the other way around: the glass selection and most of all the principal optical design and consequently the lens polish quality – all were optimized for the highest magnification. And obviously, when closing in on an object you will want the field of view to increase and not to have it become seemingly smaller. Hence the Hyperion® Zoom shows the largest apparent field of view at highest magnification.



Hyperion® Universal Zoom Mark IV eyepiece with 1¼" nosepiece

For many birders, observers of nature and astronomers alike, the Hyperion® Zoom Eyepiece is their favorite eyepiece. It is also the only zoom-eyepiece that was designed from ground up to be used with bino-viewers.

Technical data

Focal length	8 mm	12 mm	16 mm	20 mm	24 mm
Focal length with Hyperion® Barlow Lens 2,25x	3,6 mm	5,3 mm	7,1 mm	8,9 mm	10,7 mm
Field of view	68°	63°	58°	53°	48°
Parfocal	✓	✓	✓	✓	✓
Eye relief	19 mm	18,2 mm	17,4 mm	16,7 mm	16 mm
Lenses / Groups	7 / 4				
Lenses / Groups with optional Zoom Barlow	10 / 6				
Height of eyepiece body	81 mm (without barrels)				
Outer diameter	55 mm				
Weight	290g with 1¼" 309g with 2"				
Coating	Phantom Coating™ Group Multicoated				

Included Items



Please note:

The items listed here are included with the single product of the Hyperion® Zoom Mark IV #2454826.

The Mark IV Zoom is also available as a set together with the 2,25x Hyperion® Barlowlens with the item number #2454827.



Set: Mark IV Zoom +
2.25 Barlow
#2454827

1. Hyperion® Universal Zoom 8-24 mm Mark IV eyepiece
2. 1 1/4" Astro-Nosepiece with Zero-tilt safety kerfs and 1 3/8" male thread
3. 2" Astro-Nosepiece with Zero-tilt safety kerfs and 2" SC male thread
4. B-Adapter for telescopes with 1 3/8" female thread (mounted by default)
5. A-Adapter for spotting scopes with 1 3/8" female thread
6. Large adjustable eyecup (M43)
7. Winged rubber eyecup (M43)
8. Foldable eyecup (M43)
9. Soft pouch with belt strap



The Mark IV Zoom in included soft pouch

The fourth generation of Hyperion® Zoom eyepiece

Since its introduction to the market, the Hyperion® Zoom has been improved again and again. The current generation of this eyepiece weighs 290 gram and is lighter by 80 grams than its predecessor – it now also has a diameter of only 55 mm, perfect for binoviewers. The zooming-mechanism as well as the inner zooming rails for all lens groups have been modified to improve operation at cold temperatures and the parafocalty for each focal length has been finetuned.

Most important however – the Mark IV offers almost 4 mm more backfocus. This is most beneficial for application with a multitude of spotting scopes. By utilizing the supplied spotting-scope adapter ring "A", the Hyperion® Universal Zoom almost reaches four mm deeper into the eyepiece clamp of spotting scopes designed for 1¼" eyepieces, to safely reach infinity focus.

The Mark IV comes with both the 2" and 1¼" nosepieces mounted, both are free of the hated undercuts. Instead, our proprietary Zero-Tilt Safety-Kerfs provide an added measure of security by reducing the tendency of an eyepiece to slip from an unlocked eyepiece clamp. An additional little feature is the Baader-yellow soft pouch with integrated belt strap – which fastens onto many tripod legs just as well, to serve as a bin for all dustcaps that may go astray otherwise.

Unchanged are the optical quality, 68° field of view at highest magnification, Phantom Group multicoatings, a large adjustable eyecup or alternatively two M43 rubber eyecups for bino viewing. The Mark IV likewise accepts adaptation of the 2.25x Hyperion® Barlow onto the 1¼" nosepiece, featuring the magnification range of 3.6 to 10.7 mm.



Continuously adjustable Magnification with ClickStops at 8/12/16/20/24 mm

The Hyperion® Universal Zoom Eyepiece can be adjusted steplessly from 8 to 24 mm of focal length. In addition the focal lengths 8/12/16/20/24 mm are marked with „Click-Stops“, so that any of these five magnifications can be set intuitively. This is especially of importance for use with binoviewers, to easily and precisely set two Mark IV eyepieces to the same focal length for effortless binocular observation without eye-strain – even in the dark. The click-sound has been smoothed, so that hunters or birders will not disturb their targets when zooming in on them.



Eyecups

Three different eyecups are included with the Mark IV Zoom. Choose the eyecup according to your preferences or desired eye relief (with or without glasses):

Three eyecups are shipped together with the eyepiece. The M43 photo/video-thread is located on the top of the eyepiece.



1. The standard eyecup is the large height-adjustable eyecup that also fastens onto the M43 photo-thread of the eyepiece. By rotating it counterclockwise, the height will increase. This eyecup easily unthreads by simply rotating it upwards further than the uppermost stop – this reveals the M43-thread connection. This eyecup is preinstalled when the eyepiece is shipped and the most common eyecup for use with a telescope.
2. A folding rubber eyecup alternatively fits straight onto the M43-thread. This is the preferred solution for observers without glasses at a binoviewer. It gives you enough room for your nose, at the same time it provides good support to keep the perfect eye distance.
3. An even lower eyecup with foldable winged eye shield especially serves for wearers of eye glasses. The flappable side shields block stray light and side image information not part of the eyepiece field of view. This helps to concentrate on the target when using a binoviewer.

In case of need an optional, 7.5 mm long extension tube with M43-threads (#2954250) is available for further finetuning the position of the eyecups. This extension tube has one male and one female M43-thread.



The height of the large eyecup can be adjusted.



The Universal-Zoom eyepiece with the round, foldable eyecup.



The Zoom-eyepiece with the winged eyecup.

Changing the mounting adapters A and B

In the standard configuration, both 1¼" and 2" nosepieces are mounted at the eyepiece main body, including dustcaps. Remove both dust caps before using the eyepiece for the first time. This way you can use it at telescopes with 2" eyepiece clamp.

For telescopes or spotters with 1¼" clamp, it is necessary to reconfigure the eyepiece as shown below. Reconfiguring the eyepiece is always done according to the following scheme:

1. Removing the 2" nosepiece 1:

Hold the eyepiece at the locking ring 3, which also has a 2" female thread inside, and unthread the nosepiece counterclockwise. Now you can access the 1¼" nosepiece, the female 2" SC-thread and the adapter B (for telescopes). This way, you can use the eyepiece e.g. at telescopes with 1¼" eyepiece holder or at telescopes, prisms and mirrors with male 2"-SC-thread.



2. Removing the 1¼" nosepiece 2:

Remove the nosepiece by rotating it counterclockwise. Now you can see the 1⅜" thread of the telescope-adapter B 4 (or of the spotting-scope-adapter A), and you can screw the eyepiece directly onto many smaller spotting scopes (e.g. Celestron Ultima, Skywatcher).



3. Replacing the adapter for telescopes (B) 4 or spotting scopes (A) 5:

Completely unscrew the knurled 2" locking ring 3 from the bottom end of the eyepiece and replace the pre-mounted ring "B" (for instance) against the other supplied ring "A" or vice versa. Always orient the rings in a way that you can see the engraving. Now thread the knurled locking ring back onto the eyepiece to fix the adapter in its place. Do not use force.

The 1¼" nosepiece fits onto both of the adapter-rings („A" and „B").



Telescope-sided connection options

There are three different ways to adapt the Hyperion® Universal Zoom Mark IV onto a telescope. You can change between the three modes easily within seconds.

2" Eyepiece Barrel (intended for 2" star diagonals):

The nosepieces for 2" and 1¼" are both pre-mounted. The eyepiece fits "out-of-the-box" into all 2" eyepiece holders.

In this configuration, even all your 1¼"-filters as well as 2"-filters can be mounted onto either supplied barrel. But you can not use 1¼"- and 2"-filters at the same time.



1¼" eyepiece clamp with adapter B (typical for most telescopes):

To use the eyepiece on a 1¼" eyepiece clamp, all you have to do is unthread the 2" nosepiece.

The telescope adapter B is pre-mounted and fastened onto the eyepiece by a knurled 2" locking ring.

The B-Adapter raises the eyepiece by almost 4mm, so that the lower rim of the 2" locking ring is almost flush with the 1¼" nosepiece. This configuration helps to use the Mark IV with most 1¼" star diagonals, without having the knurled ring touch the the eyepiece locking screws of the star diagonal (assuming the locking screws do not stick out above the upper end of their star diagonal (see image on the left).

Also all 1¼" filters will work in this configuration if threaded into the 1¼" nosepiece



2"-SC-thread

The Mark IV Zoom eyepiece also features a female 2" (SC) thread cut into the knurled 2" locking-ring. This universal Schmidt-Cassegrain thread can be utilized as soon as the 2" nosepiece is removed. In case the optical distance is critical or in case a theft proof adaptation is preferred, this 2" thread fastens the Mark IV straight onto the back-end thread of SC-telescopes and their derivatives. Alternatively the Mark IV directly adapts onto the body of any Baader 2" star diagonal, with the help of an optional 2"/2"

inverter-ring #1508020. This ensures a permanent and very sturdy eyepiece adaptation and saves about 45 mm of optical length (the closer distance even results in a slightly larger field of view, in case you are using a Schmidt-Cassegrain optics).

Filters

The Mark IV zoom eyepiece allows you to use both 1.25" and 2" filters because each of the two nosepieces has got a filter thread. So you can also use 1.25" filters when using the eyepiece on a 2" eyepiece clamp. Please note that for space reasons it is not possible to use both 1.25" and 2" filters at the same time.

Filters cannot be used on spotting scopes either. This would make the overall length too long, and the spotting scope could no longer be focused to infinity.



Mark IV without filters

Mark IV with 1¼" filter

Mark IV with 2" Filter

Connection options for spotting scopes

Spotting scopes with integrated 1¼" eyepiece

These spotting scopes in most cases do not offer a lot of backfocus. Accordingly it is necessary to insert any eyepiece as deeply as possible into the 1¼" clamp of the spotting scope to reach infinity focus. Many eyepieces will fail at this operation since their field stop position is not optimized for use at spotting scopes. On the Mark IV simply replace the telescope adapter „B“ against the spotting scope adapter „A“, as described on page 5, to gain almost 4 mm in backfocus compared to most other eyepieces. Then re-attach the 1¼" nosepiece onto the adapter „A“, to use the Mark IV with spotting scopes like the Zeiss Conquest Gavia or the Celestron Regal M2, the Hummingbird or TrailSeeker (image).



Spotting Scopes with 1 $\frac{3}{8}$ " male thread

Such spotting scopes (e.g. many Skywatcher, Orion, Acuter, Synta and Celestron spotting scopes) can be used directly with the Hyperion® Zoom Mark IV.

Just unthread the 1 $\frac{1}{4}$ " nosepiece to expose the 1 $\frac{3}{8}$ " female thread inside the adapterring „A“ and thread the eyepiece onto the spotting scope.

This way a very short adaptation onto the spotting scope is achieved – ensuring to reach infinity focus.



Zeiss-Diascope Spotting Scopes

You have two options for use with Zeiss Diascope spotting scope. For a screw connection you need the short Zeiss-Diascope/Mark IV Zoom Adapter #2454831 (right). It offers a larger back focus so that you can focus more easily on infinity. This solution is particularly suitable for spectacle wearers. It is simply attached with the coupling nut to which the 2" sleeve is attached. For more information, see the product description of the adapter.

Alternatively, you can use the optional Zeiss-Diascope Bayonet Adapter 1 $\frac{1}{4}$ " #2454500 (left). Configure the eyepiece as described above with the Spotting Scope Adapter A and the 1 $\frac{1}{4}$ " nosepiece, then fasten the Bayonet Adapter on the 1 $\frac{1}{4}$ " nosepiece.



Zeiss Diascope Adapter
#2454500



The diascope-adapter
#2454831 is clamped
with the locking-ring

Kowa STN 770/880 Spotting Scopes

You also have two options for use with Kowa spotting scopes. For a screw connection you need the short Hyperion® Mark IV Zoom to M54 Kowa TSN 770 / 880 Adapter # 2454836. It allows the connection of the Mark IV to KOWA spotting scope with male M54 thread. The adapter replaces the 2" coupling nut and offers a larger back focus reserve so that you can focus more easily to infinity. This solution is particularly suitable if you wear glasses. Further information can be found in the product description of the adapter.



Alternatively, the Mark IV, like many other astronomical eyepieces, can be used with the 1 $\frac{1}{4}$ " / M41 eyepiece adapter for Kowa TSN 770 / 880 Spotting Scopes #2454520 on corresponding Kowa spotting scopes. The adapter is pushed over the 1.25" nosepiece and fastened. Use the short scope adapter "A". For more information, see the product description of the adapter.

Zero-Length-Adapters

The telescope adapter "B" or the spotting scope adapter "A" can be replaced by one of the following zero length adapters, which are not included in the scope of delivery. This allows additional threads to be retrofitted to adapt the eyepiece to other spotting scopes. The following zero-length thread reducing rings (without optical length) are currently available:

- **2" a / M41.5i** #2454832 – suitable for adaptation to Bausch & Lomb, Opticron and Kowa basic spotting scopes with male M41.5 x 1 connection thread
- **2" a / T-2i** #2454833 – suitable for adaptation of any accessory with male T-2 connection thread (e.g. for connection to our VariLock 20-29 or VariLock 29-46 clamps)
- **2" a / M48i** #2454834 – manufactured to adapt to any photographic M48 x 0.75 thread (the 2" astronomical filter thread)
- **2" a / M44i x 1** #2454835 – suitable for adaptation to Leica spotting scope with male M44 x 1 connection thread. Also suitable for all M44x1 threads according to the old Zeiss (Jena) standard.

The connection is the same as for the short Zeiss-Diascope/Mark IV Zoom Adapter #2454831; for some spotting scopes, however, the protective sleeve that encloses the zoom mechanism under the 1.25" sleeve must be removed. Be careful and only remove it if really necessary. For more information, refer to the product description of the adapter.

Connection options for cameras and video photography

Attaching a camery body (DSLR and System-Cameras)

After removing the height-adjustable eyecup, the universal M43-thread is exposed. This type of thread is used by most video-cameras. Baader Planetarium offers many step-up- or step-down-rings for most common threads of camera lenses, as well as the adapter #2958080 to convert from M43 to the universal photographic T-2-thread (M42x0,75).

All standard-T-rings for DSLR-cameras do attach onto this (#2958080) T-2 thread. In this way, a camera body attaches onto the Mark IV (without camera-lens). Now the Mark IV



Zoom becomes a digiscoping projection optics, also featuring variable magnification. A full-frame-DSLR will require an added ~40 mm of distance between the camera T-2-ring and the Mark IV T-2 adapter. This is advisable to retain the flat field of the Mark IV. For smaller APS-C-cameras, only ~30 mm of distance are recommended. We propose the use of an optional quick-changer, for instance the TQC/TCR Heavy Duty T-2 Quick Changing System #2456322. In this way the camera can be aligned to the horizon easily after zooming (it rotates with the zoom mechanism), or you can remove the camera body for a quick look into the eyepiece.. We recommend the following combinations:

For Full Frame Cameras:

- M43/T-2 Adapter #2958080, TQC/TCR Quick Changing System #2456322, T-2 extension tube 15 mm #1508154, T-2 extension tube 7,5 mm #1508155 ~ **40 mm optical length**
- *Alternatively:* M43/T-2 Adapter #2958080, extension tube 40 mm #1508153 ~ **41,5 mm optical length**

For APS-C:

- M43/T-2 Adapter #2958080, TQC/TCR Quick Changing System #2456322, T-2 extension tube 15 mm #1508154 ~ **32,5 mm optical length**
- *Alternatively:* M43/T-2 Adapter #2958080, 2x T-2 extension tube 15 mm #1508154 ~ **31,5 mm optical length**

The magnification will increase when inserting additional T-2 extension tubes, but this will also greatly increase the exposure time.

The setups above enable the Mark IV to work very similar to a dedicated photo-adapter as offered by many manufacturers of spotting scopes (e.g. the Zeiss-Photoadapter (#528030, offering but one fixed magnification). However the Mark IV will provide a wide range of magnification.



Example: The Zeiss Diascope 85 T/FL with Zeiss Photoadapter (left) does provide one magnification (right).



The Zeiss Diascope 85 T/FL in combination with the Hyperion® Universal Zoom Mark IV (right) offers five different steadily increasing magnifications instead of one magnification:



24mm focal length



20mm focal length



16mm focal length



12mm focal length



8mm focal length

Attaching camera-lenses by their front-lens filter threads

Most camera lenses attach onto the Mark IV (or any Hyperion® or Morpheus® eye-piece) by using the Baader SP54-system-thread, together with a whole family of Hyperion® DT-Rings. For this system, the adapter M43/SP54 #2958086 is available, which fits directly onto the Mark IV. This SP54 adapter is the base to adapt the Mark IV onto all common camera lenses with a filter thread and allows to use any such lens and camera for afocal projection imaging.

The SP 54 step-rings for making this system most versatile are called „Hyperion® DT-Rings“. Choose the appropriate adapter from SP54 onto the filter thread of your lens by reading the tread size at the engraving around the front lens of your camera-lens. Following SP54 step-rings are available:

SP54 to **M28**: #2958028
(requires also #2958090)

SP54 to **M37**: #2958037
(requires also #2958090)

SP54 to **M46**: #2958046

SP54 to **M49**: #2958049

SP54 to **M52**: #2958052

SP54 to **M55**: #2958055

SP54 to **M58**: #2958058

SP54 to **M62**: #2958062

For more information, please visit:

www.baader-planetarium.com/en/eyepiece-accessories

These step-rings are designed to ensure the shortest possible distance between eyepiece and camera front lens. This is crucial to reduce or completely avoid vignetting. The M62-ring can even serve as base for larger Hyperion® stepper-rings to adapt lenses with up to 82 mm front filter threads – but the spacing increases and the eyepiece / camera distance becomes less optimal.

For cameras with M43-thread, we recommend to use the M43 Extension Ring #2954250 to gain some safety distance, in case there is a risk that the lenses of the camera and eyepiece may touch (see image to the right). Check for correct spacing of the connection before threading camera lens and Mark IV completely to avoid damage to your valuable camera lenses.



Digiscoping-overview

There are numerous possible combinations for attaching a camera and many things to consider. Under the name digiscoping, this technique is also popular with animal lovers today, who take pictures with a spotting scope and do not need an additional, heavy telephoto lens.

All important combinations and the formulas for calculating the achievable focal lengths can be found in our Digiscoping brochure. You can obtain it from your specialist dealer or as a PDF under www.baader-planetarium.com/en/digiscoping

Use with Binoviewers

The Hyperion® Universal Zoom Mark IV has an outermost diameter of just 55 mm, which makes it a perfect choice for bino-viewers. People of all ages, even children with an interpupillary distance of just 55 mm, can use a binoviewer with two Mark IV Zoom-eyepieces – a big advantage e.g. for public observatories. The click-stops greatly ease the quick change of magnification without even having to look at the eyepiece scales.

By removing the height-adjustable eyecup, a huge gain in “nose space” is achieved. The stepped eye-piece housing offers the dearly needed space for your nose, such it becomes much easier to find the best viewing position to observe comfortably with two eyepieces side by side. By choosing the winged eyecups instead of the height-adjustable ones, even wearers of glasses can observe comfortably with both eyes.

MAXBRIGHT® II BINOVIEWER

2456460



Note: we recommend the shorter adapter ring „A“ (for spotting scopes) also for observations with bino-viewers, together with the 1¼" nosepiece. You will gain about 4 mm of optical length compared to using the adapter ring „B“ (for telescopes). Observing with any binoviewer regularly forces the user to fight for every mm of back-focus in order to achieve a focused image, just like when using a spotting scope.

Important Mark IV Zoom accessories

The optional Hyperion® Zoom Barlow Lens – 2,25x #2956180



Configuration for 1 1/4" eyepiece clamps

The 2.25x Baader Hyperion® Zoom Barlow lens was designed especially to complement the Hyperion® Zoom eyepiece. It converts the regular focal lengths of 8 to 24 mm to a range of focal lengths between 3,6 and 10,7 mm, while retaining the outstanding image quality for observing sun, moon, planets and double stars with high resolution.

The Mark IV Zoom, in conjunction with or without the Hyperion® Barlow, covers all focal lengths between 3.6 to 24 mm.

The Hyperion® Barlow works with every Hyperion® 8-24 mm Zoom eyepiece ever produced. The barlow is attached onto the 1 1/4"-nosepiece. Because of the dual nosepiece of the Mark IV, it can be used at telescopes with 1 1/4" or 2" eyepiece clamps.



Configuration for 2" eyepiece clamps

The pictures above show the Universal Zoom Mark IV eyepiece together with the barlow, on the left for 1 1/4" and on the right for 2" eyepiece clamps.

The Hyperion® Barlow comes with a T-2 thread-adaptor, to mount the Barlow in front of any camera or other accessories with T-2-threads. Combine it e.g. with a DSLR-camera – in this way the camera body will be equipped with a 1 1/4" nosepiece. The camera body just needs a standard T-ring to fit it onto any 1 1/4" eyepiece clamp.

www.baader-planetarium.com/en/camera-adapter

Attach the lens unit without the Barlow-adapter (A) directly onto many 1 1/4" eyepieces, whenever they do not already have an integrated barlow element. The result is a 2x Barlow with very good optical properties (see left image).



Hyperion® Barlow on 18mm Classic Ortho



The Hyperion® Barlow can be attached directly at a DSLR with a T-2 adapter

Some highlights of the Hyperion® Zoom Barlow Lens:

- Triplet lens for highest optical quality
- Anastigmatic Flatfield Design for high sharpness all over the field of view
- Baader Phantom Coating™ Group for highest contrast and light transmission

Mounting at the eyepiece side:

- T-2 (M42x0,75mm) thread with Barlow-Adapter (B)
- Direct connection to any Hyperion® Zoom eyepiece with Barlow-Adapter (A)
- 1 1/4" Filter thread without additional adapter



Please note:

The Barlow element can only be used with telescopes, not with spotting scopes!

Camera-sided Adapters

#2958080
M43 / T-2 Adapter



for all parts of the
Astro T-2 System

#2958086
M43 / SP54 Adapter



for eyepiece projection
with Hyperion® DT-rings

#2954250
M43 / M43 extension



for eyepiece projection
with Hyperion® DT-rings

Telescope-sided Adapters and further accessories

#2454832
2" a / M41.5i x 1



for Opticon, Bausch &
Lomb, Kowa-Base

#2454833
2" a / T-2i x 1



for all parts of the
Astro T-2 System

#2454834
2" a / M48i



for photographic
M48 System

#2454835
2" a / M44i x 1



for Leica
and Zeiss M44

#2454836
M53i / M54i



for Kowa
TSN 770/880

#1508020
2" / 2" changer ring



for sturdy 2" SC
thread-connection

#2958027
2" Stop-Ring



for finetuning of
2" focus position

#2454520
1¼" / M41 eyepiece adapter



for Kowa Spotting
Scopes & Barlows

Further accessories and information on

www.baader-planetarium.com

© 2020 Baader Planetarium. All Rights reserved. Products or instructions may change without notice or obligation. Images and illustrations may differ from the original products. We reserve the right of errors. Reproduction of this instruction manual, complete or in parts, only with written permission by



BAADER PLANETARIUM GMBH
Zur Sternwarte 4 • D-82291 Mammendorf • Tel. +49 (0) 8145 / 8089-0 • Fax +49 (0) 8145 / 8089-105
www.baader-planetarium.com • kontakt@baader-planetarium.de • www.celestron.de